

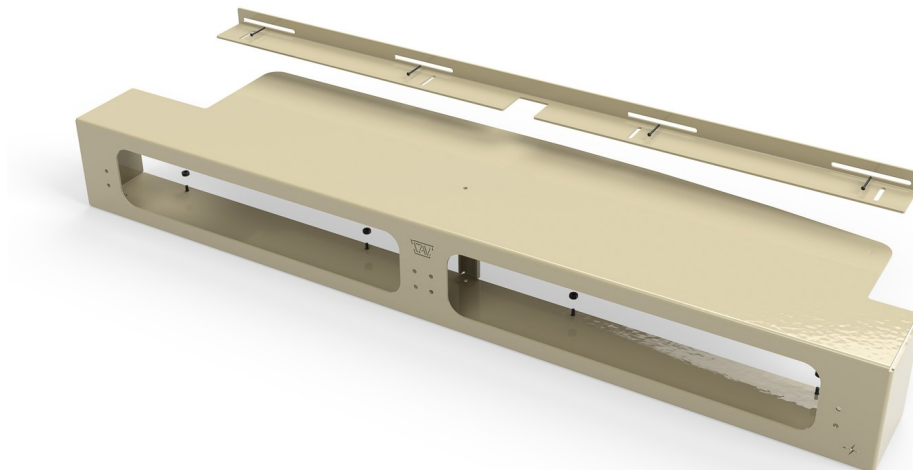


6" BED RISERS | INSTALLATION INSTRUCTIONS

JAYCO TERRAIN / ENTEGRA LAUNCH

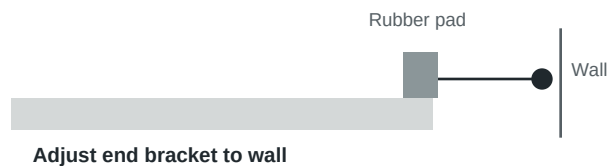

POSITION & LEVEL - DETAIL REFERENCE

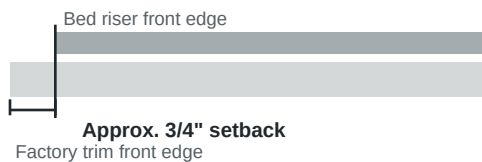

01 REMOVE OEM SCREWS

Remove the four OEM screws along the factory plastic trim piece on the bolster platform. Save the screws for reuse.

02 POSITION BED RISER

Set the riser on the factory platform in the desired position, typically about 3/4" back from the front edge of the plastic trim.

03 SECURE MOUNTING BRACKET

Reinsert the four OEM screws through the mounting bracket into their original holes. Secure the bracket against the plastic trim, then tighten the four nuts connecting the riser to the bracket.

04 LEVEL END SUPPORTS

Slide the adjustable brackets at both ends until the rubber pads contact the interior walls. Adjust to level and stabilize the riser, then tighten the nuts.

05 ATTACH CUSHION / BOLSTER

Apply Velcro strips to the top of the riser. Attach the factory bed cushion or CAV UltraLuxe mattress bolster so it cannot slide.

06 FINAL CHECK

Confirm all OEM screws, nuts, and end supports are tight. Repeat on the opposite garage platform.

INSTALLATION COMPLETE | Added bed clearance + organized garage storage.