
GLSS SUMMIT | INSTALLATION INSTRUCTIONS

Jayco Terrain / Entegra Launch

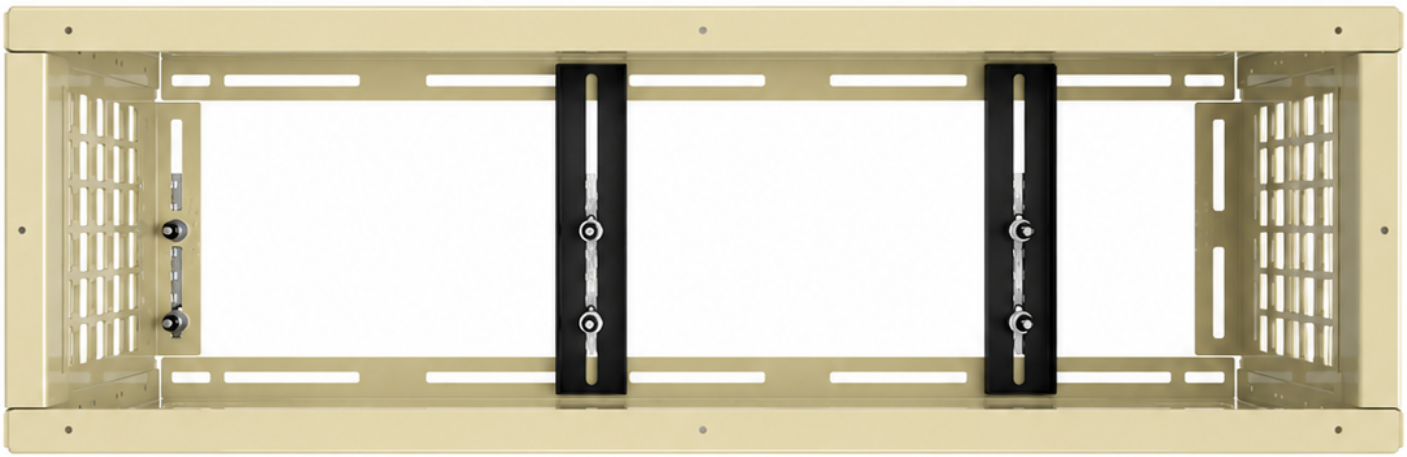

INCLUDED COMPONENTS

1 GLSS Summit bench seat | 6 L-Track bolts | 6 washers | 6 nuts | 2 mounting brackets

INSTALLATION

1. Position the first bolts — Insert two L-Track bolts into the factory OEM L-Tracks closest to the rear doors on the driver side.

2. Position the bench — Set the GLSS Summit against the driver-side wall. Align the two bolts with the mounting slots on the end of the GLSS and lower it into place.

3. Install the remaining bolts — Insert the other four L-Track bolts into the other OEM L-Tracks, two bolts in each track.

4. Add the mounting brackets — Place the two included mounting brackets over the four bolts, aligning the bracket slots with the bolts.

5. Secure all mounting points — Install the included washers and nuts on all six L-Track bolts and tighten securely.

6. Inspect — Confirm the bench does not shift and that the storage doors and flip-up lid operate freely.

SAFETY: Recheck mounting hardware periodically, especially after rough-road travel. Do not use as an occupied passenger seat while driving.